


0.9 Indoor tight buffer Cable

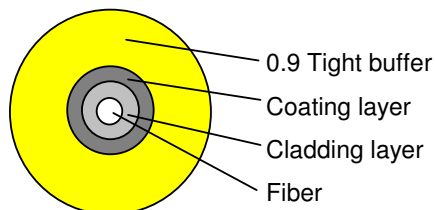

Application:

- ☆.Components for various indoor cables.
- ☆.Suitable for patch cords and pigtails.
- ☆.Suitable for communication equipment served.

Characteristics:

- ☆.Soft. Easy to strip.
- ☆.High quality tight buffered or Loose tube.
- ☆.Excellent mechanical and environmental performance.
- ☆.Small cable volume. Light weight.

Technical Parameters:

Cable Count (MM)	Outside Diameter (MM)	Weight (KG)	Minimum allowable Tensile Strength (N)		minimum allowable Crush Load (N/100mm)		Minimum Bending Radius (MM)		Storage temperature (℃)
			short term	long term	short term	long term	short term	long term	
1	0.9+/-0.05	0.90	100	50	100	80	20D	10D	-20+60

Optical Characteristics

Fiber Sort	Multimode	G.651	A1a:50/125	Graded-index fiber
			A1b:50/126	
	Singlemode	G.652(A、B、C、D)		B1.1:Conventional fiber
		G.653		B2: Zero dispersion shifted
		G.654		B1.2 :Cut-off wavelength shifted
		G.655		B4: Main technical data for positive dispersion shifted single-mode fiber