


Central Loose Tube In/Out Optical Cable

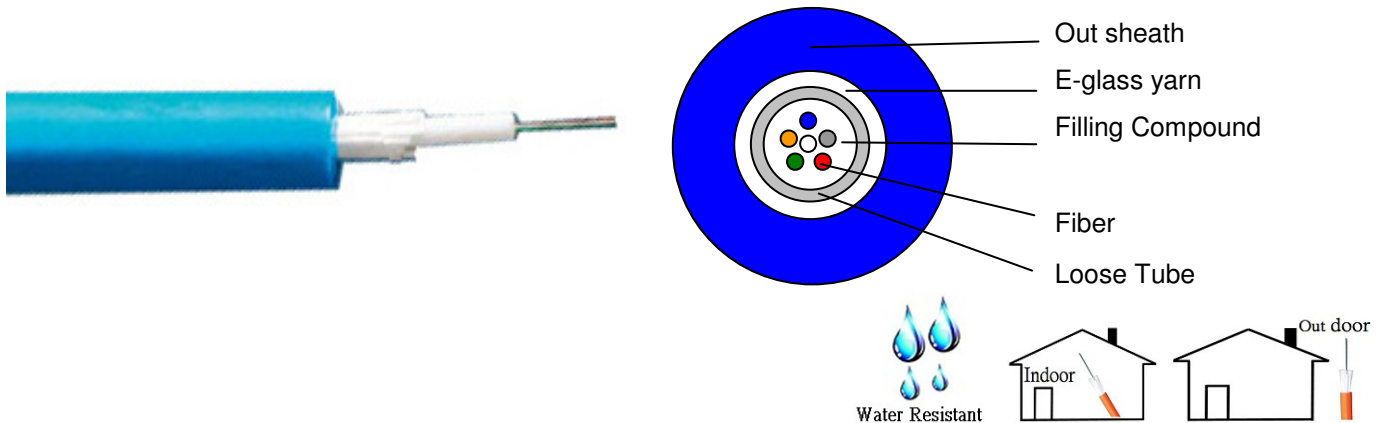

Application:

- ☆.Adopted to indoor or outdoor distribution.
- ☆.Small cable size , lightweight.
- ☆.With excellent waterproofing performance.

Characteristics:

- ☆.Filler protect tube fiber .
- ☆.E-glass member potentiate.
- ☆.Fiber Counl:2~12 cores

Technical Parameters:

Cable Count	Outside Diameter (MM)	Weight (KG)	Minimum allowable Tensile Strength (N)		minimum allowable Crush Load (N/100mm)		Minimum Bending Radius (MM)		Storage temperature (℃)
			short term	long term	short term	long term	short term	long term	
02	6.0	45.00	600	200	1000	200	20D	10D	-20+60
04	6.0	45.00	600	200	1000	200	20D	10D	-20+60
06	6.0	45.00	600	200	1000	200	20D	10D	-20+60
08	6.0	45.00	600	200	1000	200	20D	10D	-20+60
10	6.0	45.00	600	200	1000	200	20D	10D	-20+60
12	6.0	45.00	600	200	1000	200	20D	10D	-20+60

Optical Characteristics

Fiber Sort	Multimode		A1a:50/125	Graded-index fiber
			A1b:62.5/125	
	Singlemode	G.652(A、B、C、D)		B1.1:Conventional fiber
		G.653		B2: Zero dispersion shifted
		G.654		B1.2 :Cut-off wavelength shifted
		G.655		B4: Main technical data for positive dispersion shifted single-mode fiber