

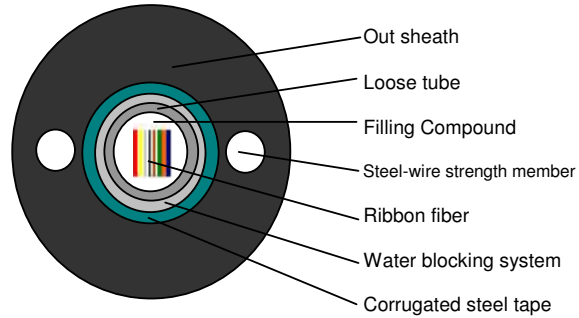


## Central Loose Tube Ribbon Fiber Outdoor Cable

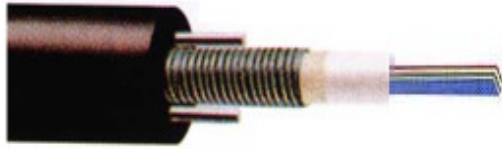

### Application:

- ☆.Adopted to Outdoor distribution.
- ☆.Suitable for aerial .pipeline laying method.
- ☆.Long distance and local area network communication.

### Characteristics:

- ☆.Steel-wire parallel member.filler protect tube fiber steel tape amored.
- ☆.Adopt optic fiber ribbon .compact structure.light weight.
- ☆.Excellent mechanical and environmental performance.
- ☆.can be installed conveniently and operated simply.

### Technical Parameters:

Cable Count	Out sheath Diameter (MM)	Weight (KG)	Minimum allowable Tensile Strength (N)		minimum allowable Crush Load (N/100mm)		Minimum Bending Radius (MM)		Storage temperature (℃)
			short term	long term	short term	long term	short term	long term	
24	15	240.00	1500	600	1000	300	20D	10D	-40+60
48	15	240.00	1500	600	1000	300	20D	10D	-40+60
60	15	240.00	1500	600	1000	300	20D	10D	-40+60
72	16	272.00	1500	600	1000	300	20D	10D	-40+60
84	16	272.00	1500	600	1000	300	20D	10D	-40+60
144	18	325.00	1500	600	1000	300	20D	10D	-40+60

### Optical Characteristics

Fiber Sort	Multimode	G.651	A1a:50/125	Graded-index fiber
			A1b:62.5/125	
	Singlemode	G.652(A、B、C、D)		B1.1:Conventional fiber
		G.653		B2: Zero dispersion shifted
		G.654		B1.2 :Cut-off wavelength shifted
		G.655		B4: Main technical data for positive dispersion shifted single-mode fiber