


Flat Twin Duplex Military Tactical Armored indoor Cable

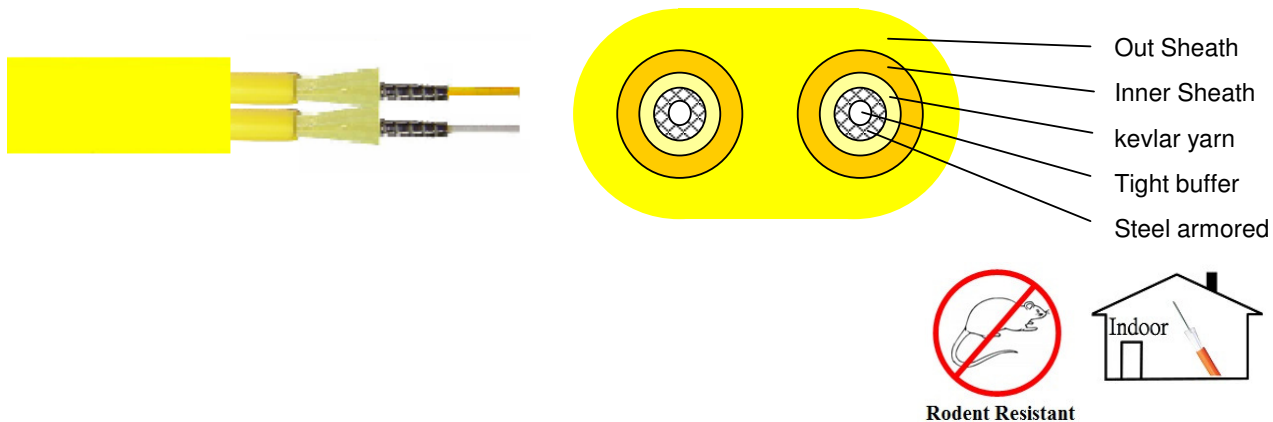

Application:

- ☆.Adopted to indoor distribution.
- ☆.As pigtail of communication equipment.
- ☆.Suitable for communication equipment served.
- ☆.Can be installed conveniently and operated simply.

Characteristics:

- ☆.Two single-fiber as basic unit.flat twin configuration.
- ☆.Single-cable with 0.6 tight buffer.kevlar yarn steel armored flexible or out sheath or independent strength member.
- ☆.Excellent mechanical and environmental performance.

Technical Parameters:

Out Diameter (MM)	Inner Diameter (MM)	Weight (KG)	Minimum allowable Tensile Strength (N)		minimum allowable Crush Load (N/100mm)		Minimum Bending Radius (MM)		Storage temperature (℃)
			short term	long term	short term	long term	short term	long term	
3.0×5.0	2.8	95.00	1000	300	1000	500	20D	10D	-20+60

Optical Characteristics

Fiber Sort	Multimode	G.651	A1a:50/125	Graded-index fiber
			A1b:62.5/125	
	Singlemode	G.652(A、B、C、D)		B1.1:Conventional fiber
		G.653		B2: Zero dispersion shifted
		G.654		B1.2 :Cut-off wavelength shifted
		G.655		B4: Main technical data for positive dispersion shifted single-mode fiber