


Ribbon Indoor Cable

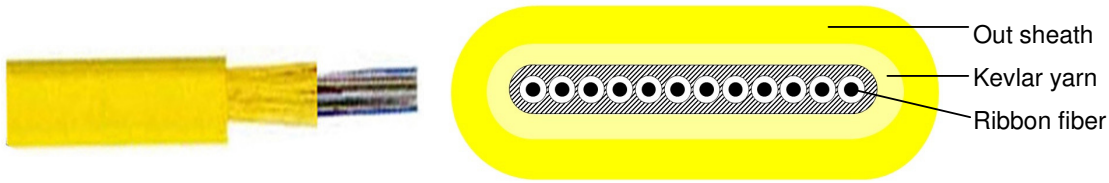

Application:

- ☆.Adopted to indoor disibution.
- ☆.As pigtail of communication equipment.
- ☆.Suitable for communication equipment served.

Characteristics:

- ☆.Adopt optic fiber ribbon as the central unit aramid strength member around.
- ☆.Flexible.easy to peel off.
- ☆.Small bend radius.

Technical Parameters:

Cable Count (MM)	Outside Diameter (MM)	Weight (KG)	Minimum allowable Tensile Strength (N)		minimum allowable Crush Load (N/100mm)		Minimum Bending Radius (MM)		Storage temperatu re (℃)
			short term	long term	short term	long term	short term	long term	
2	3.5×2.5	13.00	500	100	500	100	20D	10D	-20+60
4	3.5×2.5	13.00	500	100	500	100	20D	10D	-20+60
6	4.0×2.5	15.00	500	100	500	100	20D	10D	-20+60
8	4.5×2.2	15.00	500	100	500	100	20D	10D	-20+60
12	4.8×2.2	17.00	500	100	500	100	20D	10D	-20+60

Optical Characteristics

Fiber Sort	Multimode	G.651	A1a:50/125	Graded-index fiber
			A1b:62.5/125	
	Singlemode	G.652(A、B、C、D)		B1.1:Conventional fiber
		G.653		B2: Zero dispersion shifted
		G.654		B1.2 :Cut-off wavelength shifted
		G.655		B4: Main technical data for positive dispersion shifted single-mode fiber