


Single-Fiber Optical Indoor Cable

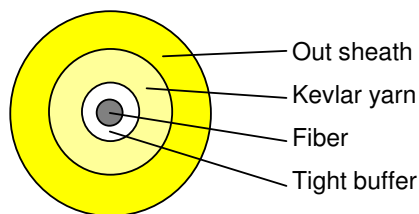

Application:

- ☆.Adopted to indoor distribution..
- ☆.As pigtail of communication equipment.
- ☆.Suitable for communication equipment served.
- ☆.Can be installed conveniently and perated simply.

Characteristics:

- ☆.High strength kevlar yarn member.
- ☆.High quality tight buffered or loose tube.
- ☆.Soft and easy to strip.
- ☆.Round construction.

Technical Parameters:

Out sheath Diameter (MM)	Tight buffer Diameter (MM)	Weight (KG)	Minimum allowable Tensile Strength (N)		minimum allowable Crush Load (N/100mm)		Minimum Bending Radius (MM)		Storage temperature (℃)
			short term	long term	short term	long term	short term	long term	
1.6	0.6	2.80	150	80	500	100	20D	10D	-20+60
1.8	0.6	3.00	150	80	500	100	20D	10D	-20+60
2.0	0.9	4.25	150	80	500	100	20D	10D	-20+60
2.4	0.9	5.00	150	80	500	100	20D	10D	-20+60
2.8	0.9	6.60	150	80	500	100	20D	10D	-20+60
3.0	0.9	7.00	150	80	500	100	20D	10D	-20+60

Optical Characteristics

Fiber Sort	Multimode	G.651	A1a:50/125	Graded-index fiber
			A1b:62.5/125	
	Singlemode	G.652(A、B、C、D)		B1.1:Conventional fiber
		G.653		B2: Zero dispersion shifted
		G.654		B1.2 :Cut-off wavelength shifted
		G.655		B4: Main technical data for positive dispersion shifted single-mode fiber