


All-Purpose Indoor Cable

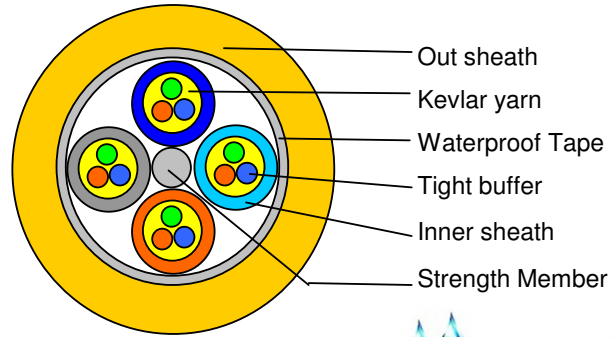

Application:

- ☆.Indoor level and vertical laying.
- ☆.Ceiling laying surface laying etc.
- ☆.Connected to connectors of various models interconnect.

Characteristics:

- ☆.Multi cable design.
- ☆. multi cable with independent strength member.
- ☆.Non-metal central strength member.
- ☆.Fiber Counl:12~144

Technical Parameters:

Cable Count	Outside Diameter (MM)	Tight buffer Diameter (MM)	Weight (KG)	Minimum allowable Tensile Strength (N)		minimum allowable Crush Load (N/100mm)		Minimum Bending Radius (MM)		Storage temperature (°C)
				short term	long term	short term	long term	short term	long term	
12	15.5	0.9	205.00	1500	500	1500	600	20D	10D	-20+60
24	15.5	0.9	205.00	1500	500	1500	600	20D	10D	-20+60
36	17.5	0.9	255.00	1500	500	1500	600	20D	10D	-20+60
48	17.5	0.9	255.00	1500	500	1500	600	20D	10D	-20+60
60	19.5	0.9	320.00	1500	500	1500	600	20D	10D	-20+60
72	19.5	0.9	320.00	1500	500	1500	600	20D	10D	-20+60

Optical Characteristics

Fiber Sort	Multimode	G.651	A1a:50/125	Graded-index fiber
			A1b:62.5/125	
Singlemode	G.652(A、B、C、D)			B1.1:Conventional fiber
	G.653			B2: Zero dispersion shifted
	G.654			B1.2 :Cut-off wavelength shifted
	G.655			B4: Main technical data for positive dispersion shifted single-mode fiber