


Waterproof Cable

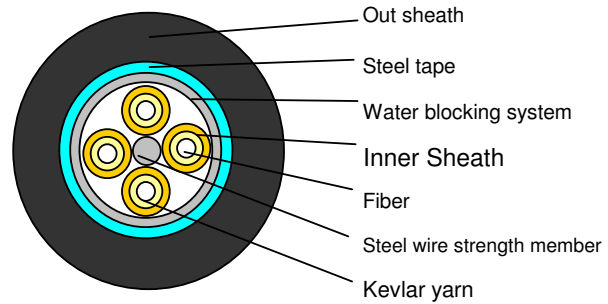

Application:

- ☆.Adopted to Outdoor distribution.
- ☆.Connected to connectors of various models interconnect.
- ☆.Can be installed conveniently and operated simply.

Characteristics:

- ☆.More single-core cable design.
- ☆.Steel tape armoured.
- ☆.Waterproof and applicable scurviness environment.

Technical Parameters:

Cable Count	Out sheath Diameter (MM)	Weight (KG)	Minimum allowable Tensile Strength (N)		minimum allowable Crush Load (N/100mm)		Minimum Bending Radius (MM)		Storage temperature (°C)
			short term	long term	short term	long term	short term	long term	
2	10.5	155.00	1500	600	1000	300	20D	10D	-40+60
4	10.5	155.00	1500	600	1000	300	20D	10D	-40+60
6	11.5	185.00	1500	600	1000	300	20D	10D	-40+60
12	12.5	225.00	1500	600	1000	300	20D	10D	-40+60

Optical Characteristics

Fiber Sort	Multimode	G.651	A1a:50/125	Graded-index fiber
			A1b:62.5/125	
Singlemode	G.652(A、B、C、D)			B1.1:Conventional fiber
	G.653			B2: Zero dispersion shifted
	G.654			B1.2 :Cut-off wavelength shifted
	G.655			B4: Main technical data for positive dispersion shifted single-mode fiber